



EUROPEAN PATENT APPLICATION

(43) Date of publication:
11.07.2001 Bulletin 2001/28

(21) Application number: 01100390.2

(22) Date of filing: 05.01.2001

(84) Designated Contracting States: AT BE CH CY DE DK ES FI FR GB GR IE IT LU MC NL PT SE TR Designated Extension States: AL LT LV MK RO SI	(72) Inventor: Yoshihiro, Takuji 4-1 Chuo 1-chome, Wako-shi, Saitama (JP)
(30) Priority: 06.01.2000 JP 2000001110 KAISHA Minato-ku, Tokyo (JP)	(74) Representative: Liska, Horst, Dr.-Ing. et al Weickmann & Weickmann Patentanwalte Postfach 96 08 20 81635 München (DE)

(54) Electronic data management system and method


(57) The invention provides an electronic data management system with a simplified configuration, wherein the authenticity of the electronic data and the specification of the source of unauthenticated electronic data can be determined accurately.

A drawing output processor (22) transmits original data (A1) which is original electric drawing data to an order receiving unit (30) with a tag (T) attached. The order receiving unit (30) and a manufacturing unit (32) transmit a manufacturer's copied data (B2(T)) copied from the original data (A1(T)) to an inspection unit (24).

The inspection unit (24) transmits the inspection result (Fa) for the product (M) the client's copied data (A2) recorded from the original data (A1), and the manufacturer's copied data (B2(T)) to a determination unit (26).

The determination unit (26) compares the tag (T) exchanged from the manufacturer's copied data (B2) with the original value of the client's copied data (A3) and the original value of the manufacturer's copied data (B2) and determines the authenticity of the client's copied data (A2) and the manufacturer's copied data (B3).

FIG. 1 10. Electronic data management system

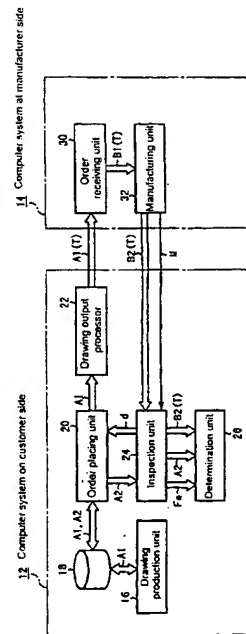

Description

[0001] This invention relates to an electronic data management system and method, and more particularly relates to an electronic data management system and method capable of determining the authenticity of electronic data.

[0002] When a customer places an order with a manufacturer, products different from a drawing submitted with the order may be delivered. Particularly, when electronic (numerical) data is submitted as the drawings for the ordered products, the following reasons can cause deficient products.

1. A manufacturer has made a mistake in the process of manufacturing products.

2. A manufacturer has altered the drawings and then manufactured the products according to the altered drawings.

3. A customer has altered the drawings after placing the order.

[0003] Whether or not an electronic drawing is altered can be determined by installing an authentication system into both of the customer and manufacturer computer systems.

[0004] An authentication system, for example, as disclosed in Japanese Patent Publication Laid-open No. Hei 9-198437, is designed to be capable of determining whether or not the electronic document is altered according to authentic information recorded within the electronic document (i.e. electronic drawing) and authentication information recorded in the computers of both customer and manufacturer.

[0005] However, with the authentication system described above, each time authentication is executed at each computer system, the authentication information is required to be recorded in a computer and within an electronic document, and the authentication process therefore becomes complicated.

[0006] And as this authentication system requires the installation of management functions to record the authentication information in each computer, the configuration of the computer system becomes complicated.

[0007] Moreover, this authentication system has difficulty in determining which customer or manufacturer has altered an electronic document in cases where an electronic document is altered after authentication. Therefore, it has been difficult to specify the reasons for the alteration in order to clarify exactly where the responsibility lies for a deficient product.

[0008] It is therefore the object of the present invention to set out to provide an electronic data management system and method capable of determining authenticity of electronic data accurately, and capable of specifying the computer system used in changing the electronic data in cases where electronic data is found to be not authenticated, while retaining a straightforward configuration.

[0009] Here, a description is given with respect to the numerals shown in the attached drawings to enable ease of understanding. The content of this description is applicable to but not limited to the items to which numerals are attached.

[0010] An electronic data management system related to the present invention (10) is an electronic data management system (10) for using electronic data mutually among a plurality of computer systems classified into at least two groups, wherein a reference characteristic value extracting means (26) extracts a reference characteristic value (H1) from copied electronic data (B2(T)) to which a reference characteristic value (H1) calculated from an original electronic data (A1) is attached, comparison subject characteristic value calculating means (26) calculates comparison subject characteristic values (H2, H3) from the copied electronic data (B2) and/or electronic data (A2) received from the original electronic data (A1), and determining means (26) compares the reference characteristic value (H1) with the comparison subject characteristic values (H2, H3) then determines the authentication of the copied electronic data (B2) and/or the copied electronic data (A2) (the invention as claimed in Claim 1).

[0011] In this case, the authentication of the copied electronic data (B2) and/or the copied electronic data (A2) can be determined by comparing a reference characteristic value (H1) attached to a copied electronic data (B2(T)) with comparison subject characteristic values (H2, H3) calculated from a copied electronic data (B2) and/or copied electronic data (A2) with this electronic data management system (10). Therefore the authentication of the copied electronic data (B2) and/or the copied electronic data (A2) can be managed securely, and the system configuration can be even more extensively simplified compared to the system with the authentication management functions, etc. installed in each computer system.

[0012] The computer systems above are classified into a management computer system (12) in which the reference characteristic value extracting means (26), the comparison subject characteristic value calculating means (26), and the determination means (26) are installed, and a managed computer system (14) which does not belong to the management computer system (12). Source of the copied electronic data (B2) and/or the copied electronic data (A2) are managed in the management computer system (12) (as disclosed in claim 2 of the invention).

[0013] Therefore in the case where the copied electronic data (B2) and/or the copied electronic data (A2) are not authenticated according to sources of the copied electronic data (B2) and/or the copied electronic data (A2), which of the management computer system (12) or the managed computer system (14) was used in changing the electronic data can be specified.

[0014] In this case, the management computer system

original electronic drawing data A1 (T1), a process for calculating reference characteristic value (H2) from the stored graphic information of the copied electronic drawing data (A2) of the original electronic drawing data (A1), and a process for determining whether or not either of the copied electronic drawing data (B2) or the copied electronic drawing data (A2) is altered by comparing the reference characteristic value (H1) with the comparison subject characteristic value (H2) (the invention claimed in Claim 8).

[0020] Therefore the authenticity of the copied electronic drawing data (B2) and the copied electronic drawing data (A2) can be managed securely, and the electronic data management method with simplified configuration will be available.

FIGS. 1 to 5 illustrate preferred embodiments of the present invention, in which:

[0021] FIG. 1 is a block view of a configuration for an electronic data management system of a first embodiment of the present invention.

[0022] FIG. 2 is a block diagram of a configuration of an drawing output processor.

[0023] FIG. 3 is a flowchart showing a determination process executed in an inspection unit constituting the electronic data management system described in FIG. 1, for determining whether or not a product is defective.

[0024] FIG. 4 is a flowchart showing a determination process executed in a determination unit constituting the electronic data management system described in FIG. 1, for determining whether or not the content of the electric drawing data has been changed.

[0025] FIG. 5 is a flowchart showing a determination process executed in a determination unit constituting the electronic data management system described in FIG. 1, for determining whether or not the content of the electric drawing data has been changed.

[0026] The following is a description with reference to the drawings of the preferred embodiments of the present invention.

[0027] FIG. 1 is a block view of a configuration for an electronic data management system (10) of a first embodiment of the present invention.

[0028] The electronic data management system 10 is for using electronic drawing data as electronic data mutually at a customer side and at manufacturer side, and comprises the customer computer system 12 on the customer side and the manufacturer computer system 14 on the manufacturer side. The customer computer system 12 and manufacturer computer system 14 can be configured with a plurality of computer systems.

[0029] The customer computer system 12 comprises a drawing production unit 16, a storage device (storage means) 18, an order placing unit 20, a drawing output processor (reference characteristic value attaching means) 22, an inspection unit 24, and a determination unit (reference characteristic value extracting means

from claim 12) can also be provided with reference characteristic value attaching means (22), that attaches the reference characteristic value (H1) calculated from the original electronic data (A1) to the original electronic data (A1) (as disclosed in claim 3 of the invention).

[0015] Each item of electronic data (A1, A2, B2) is electronic drawing data, and each characteristic value (H1, H2, H3) can be provided as a hash value calculated from graphic information included in each item of electronic drawing data (as disclosed in claim 3 of the invention).

[0016] The management computer system (12) is a customer's computer system for placing orders for products based on electronic drawing data provided as the original electronic data (A1). The managed computer system (14) is a manufacturer's computer system for manufacturing products for which an order was placed by the customer's computer system (12) and for delivering the manufactured products (M). The customer computer system (12) includes means for determining whether or not the products (M) and electronic drawing data (A2, B2) correspond to each other by comparing the copied electronic data (A2) outputted from the customer computer system (12) and/or the electronic drawing data provided as copied electronic data (B2) outputted from the manufacturer computer system (14) and the products (M) delivered from the manufacturer and the computer system (14) (as disclosed in claim 5 of the invention).

[0017] Therefore whether or not the products (M) are defective can be managed securely in the customer computer system (12).

[0018] The reference characteristic value (H1) is encrypted or processed by electronic water-mark technology and embedded in the electronic data (A1(T), B2(T)). Therefore no computer system other than the specified computer systems (management computer system (12), customer computer system (12)) can change the content of the reference characteristic value (H1) and the authenticity of the copied electronic data (B2) and/or the copied electronic data (A2) can therefore be managed securely.

[0019] An electronic data management method of the present invention is an electronic data management method for storing original data at the customer computer system (12) and outputting the original electronic data (A1) as drawing data for the ordered products to a manufacturer computer system (14) comprises a process for outputting the original electronic drawing data (A1(T1)) with an attached reference characteristic value (H1) previously calculated from the graphic information of the original electronic drawing data (A1), a process for extracting the reference characteristic value (H1) from the copied electronic drawing data (A1(T1)) of the

and determination means) 26. The manufacturer computer system 14 comprises an order receiving unit 30 and a manufacturing unit 32.

[0030] The drawing production unit 16 of the customer computer system 12 produces the drawing for the product being ordered, and outputs the produced drawing to the storage device 18 as original electronic drawing data (hereafter referred simply as original data). The storage device 18 comprises storage media such as memory elements, a hard disk, or a laser disc and stores the original data A1 calculated from the drawing production unit 16 in the storage media. Original data A1 (T) with a tag T attached described later can be stored in the storage device 18.

[0031] The order placing unit 20 reads out the original data A1 from the storage device 18, and outputs the original data A1 to the drawing output processor 22 as the drawing for the product being ordered.

[0032] FIG. 2 is a block diagram of a configuration for the drawing output processor 22. The drawing output processor 22 comprises hash value calculation means 40, hash value encryption means 42, and tag attachment means 44.

[0033] The original data A1 outputted from the order placing unit 20 is supplied to the hash value calculation means and the tag attachment means 44.

[0034] The hash value calculation means 40 calculates the reference hash value H1 as a reference characteristic value from graphic information such as lines, points, dimensions, finish marks, etc., and management information such as the title of the drawing, name of the drafter, and revision data, etc.

[0035] The hash value encryption means 42 encrypts the reference hash value H1 calculated by the hash value calculation means 40, and calculates an encrypted reference hash value H1'.

In this case, the encryption process is performed using encryption methods such as the methods employed by PGP (Pretty Good Privacy), etc.

[0036] The hash value encryption means 42 encrypts the reference hash value H1 calculated by the hash value calculation means 40, and calculates the encrypted reference hash value H1'. When "CATIA" (software from Dassault systems) is used for producing the drawings, the encrypted reference hash value H1' is preferably converted into hexadecimal numbers and capitalized, and then embedded in the original data A1 in order to maintain compatibility with the functions of "CATIA".

[0037] In this case, the reference hash value H1' included in the tag T is encrypted, and the tag T is embedded in the original data A1 after being processed with electronic water-mark technology (technology for embedding a water-mark into an original image, where a water-mark embedded in an original image is created in a manner which is indistinguishable with the naked eye from the original image), etc. It is therefore not possible for any system other than the drawing output processor

22 and the determination unit 26 of the customer computer system 12 to confirm the existence of the tag T, or determine or change the content of the tag T.

[0038] The tag attachment means 44 outputs the original data A1 (T) including the tag T to the order receiving unit 30 of the manufacturer computer system 14, as drawing data for the product being ordered. Here, the character "T" describes that the tag T is embedded in the original data A1.

[0039] As described in FIG. 1, when the order receiving unit 30 receives the original data A1 (T) from the customer computer system 12, the order receiving unit 30 determines the content of the original data A1 (T) (the content of the order received), and outputs the copied electronic data B1 (T) (hereafter referred as copied data on the manufacturer side) copied at the order receiving unit 30 to the manufacturing unit 32.

[0040] Regarding the possibility of the change of the content of the original data A1 with the exception of the tag T made at the order receiving unit 30, the numeral used to describe the copied data on the manufacturer side outputted from the order receiving unit 30 will now be changed from "A1" to "B1". Similarly, changes of "A1" to "A2", and "B1" to "B2" will also be made.

The numeral "A" describes that the source of the electronic drawing data is the customer computer system 12, and the numeral "B" describes that the source of the electronic drawing data is the manufacturer computer system 14.

[0041] The manufacturing unit 32 manages the manufacture of the product (controls the production process) according to the copied data on the manufacturer side B1 (T) outputted from the order receiving unit 30.

Then the manufacturing unit 32 delivers the manufactured product M to the customer, and output the copied data on the manufacturer side B2 (T) copied from the manufacturing this product M to the inspection unit 24 of the customer computer system 12.

[0042] When the inspection unit 24 receives the product M and the copied data on the manufacturer side B2 (T) from the manufacturer computer system 14, the inspection unit 24 outputs the command d that requires the supply of the electronic drawing data A2 (the copied electronic drawing data (hereafter referred as copied data on the customer side) recycled from the original data by the customer), which corresponds to the product M and the copied data on the manufacturer side B2 (T).

[0043] The copied data on the customer side A2 read out from the storage device 18 according to the command d is transferred from the order placing unit 20 to the inspection unit 24.

[0044] The inspection unit 24 then determines whether or not the product M is defective by comparing the copied data on the customer side A2 and the copied data on the manufacturer side B2 (T) outputted from the manufacturer computer system 14 with the product M. In this case, the inspection unit 24 manages the source

of the copied data on the customer side A2 and the copied data on the manufacturer side B2 (T).

[0045] FIG. 3 is a flowchart showing a determination process executed in an inspection unit 24 for determining whether or not the product M is defective.

[0046] In step S11, the inspection unit 24 compares the copied data on the customer side A2 with the product M (A2=M?).

In this step, the copied data on the customer side A2 and the product M are compared by utilizing the three-dimensional geometry measuring apparatus, for example, the apparatus for measuring the shape of the surface of the product M by scanning the surface of the product M with means such as an inspection needle or laser beam, etc.

[0047] When the copied data on the customer side A2 and the product M is confirmed to coincide in this step and the product M is confirmed to coincide in the step S11 (YES), the value of the flag Fa describing the condition of the product M in the step S12 is set to Fa=0 to show that the product M is not defective.

[0048] When the copied data on the customer side A2 and the product M is confirmed not to coincide in this step S11 (NO), the process proceeds to step S13.

[0049] In step S13, the inspection unit 24 compares the copied data on the manufacturer side B2 (T) (copied data B2 on the manufacturer side B2 practically) with the product M in a similar process executed in step S11 (B2=M?).

[0050] When it is confirmed that the copied data on the manufacturer side B2 (T) and the product M does not coincide in step S13 (NO), i.e., the product M does not correspond to neither of the copied data on the customer side A2 nor the copied data on the manufacturer side B2 (T), the value of the flag Fa in the step S14 will be set as Fa=1 to show that the product M is defective.

[0051] When it is confirmed that the copied data on the manufacturer side B2 (T) and the product M coincide in step S13 (YES), the value of the flag Fa in the step S15 is set as Fa=2 to show that whether or not the product M is defective has not yet been determined.

[0052] When the processing of steps S11 to S15 is complete, the inspection unit 24 supplies the value of the flag Fa that describes the condition of the product M, the copied data on the customer side A2, and the copied data on the manufacturer side B2 (T) to the determination unit 26 as described in FIG. 1.

[0053] When the determination unit 26 receives the flag Fa from the inspection unit 24, the copied data on the customer side A2 and the copied data B2 (T) on the manufacturer side, the determination unit 26 determines whether or not any changes are made on the contents of the copied data on the customer side A2 or the copied data on the manufacturer side B2 (T) as described in the flowchart shown in FIG. 4.

[0054] In step S21, the determination unit 26 confirms whether or not the value of the flag Fa is set to Fa=2 showing that whether or not the product M is defective has not yet been determined. When the value of the flag

Fa is set as Fa=2 (YES), the process proceeds to the next step S22, and when the flag Fa is not set as Fa=2 (i.e., Fa=0 or Fa=1) (NO), the process is forwarded to step S29 as described later.

[0055] In the step S22, the determination unit 26 extracts the tag T attached by the drawing output processor 22 from the copied data on the manufacturer side B2 (T).

Then in step S23, the determination unit 26 extracts the encrypted reference hash value H1' from the tag T, proceeds to step S24, and decodes the reference hash value H1' from the encrypted reference hash value H1'. I.e., these processes executed in these steps S22 to S24 have the function of the reference characteristic value extracting means for extracting the reference hash value H1' as the reference characteristic value from the copied data B2 on the customer side B2 (T).

[0056] In the following step S25, the determination unit 26 calculates the hash value on the customer side H2 as comparison subject characteristic value from the copied data on the customer side A2, i.e., the process executed in this step S25 has the function of the comparison subject characteristic value calculating means for calculating the hash value on the customer side H2 as the comparison subject characteristic value from the copied data on the customer side A2 for comparison with the reference hash value H1.

[0057] In the following step S26, the determination unit 26 compares the reference hash value H1 extracted in the step S24 with the hash value on the customer side H2 calculated in step S25.

[0058] When it is confirmed that the reference hash value H1 and the hash value on the customer side H2 coincide in step S26 (YES), the value of the flag Fb describing the authenticity of the copied data on the customer side A2 and the copied data on the manufacturer side B2 (T) in the step S27 are set as Fb=1 to show that changes were made on the copied data on the manufacturer side B2 (T).

[0059] This result can be obtained as follows; when the reference hash value H1 and the hash value on the customer side H2 coincide, the original data A1 and the copied data on the customer side A2 can be determined to coincide. When the product M and the copied data on the manufacturer side B2 (T) coincide (step S14 in FIG. 3) when the product M and the copied data on the customer side A2 do not coincide (the step S12 in FIG. 3), the copied data on the manufacturer side B2 (T) is regarded to have been changed in the manufacturer computer system 14.

[0060] When the reference hash value H1 and the hash value on the customer side H2 are confirmed not to coincide in step S26 (NO), the value of the flag Fb in the following step S28 is set to Fb=2 to show that changes were made to the copied data on the customer side A2.

[0061] This result can be obtained as follows; when the reference hash value H1 and the hash value on the

customer side H2 do not coincide, for example, the original data A1 (the copied data on the customer side A2) stored in the storage device 18 can be considered to have been changed, for example, by the drawing output processor 16 of the customer computer system 12.

[0062] Therefore the process executed in the step S28 functions as determination means for determining the authenticity of the copied data on the customer side A2 by comparing the reference hash value H1 with the hash value on the customer side H2.

[0063] In the following step S29, the determination unit 26 outputs information based on the value of the flag Fb set in steps S27 and S28 and the value of the flag Fa set by the inspection unit (the information such as whether or not the product M is defective, the copied data on the customer side A2 and the copied data on the manufacturer side B2 coincides with the original data A1 (whether or not this data is authentic), and the source where the change has been made when the copied data on the customer side A2 and the copied data on the manufacturer side B2 are not authenticated) to the output device such as display device which doesn't show the drawing, and to a printer, etc. The output device outputs the information of the defectiveness of the product M, and the authenticity of each item of electronic drawing data A1, A2, B1, B2, etc.

[0064] Such a configuration can also be provided wherein the determination unit 26 calculates the hash value of the copied data on the manufacturer side B2, and determines if any change has been made to the copied data on the manufacturer side B2 by comparing the hash value with the reference hash value H1 (the reference hash value H1 attached to the copied data on the manufacturer side B2) calculated in the step S24.

The following is a detailed description of this process with reference to the flowchart shown in FIG. 5.

[0065] The inspection unit 26 executes the similar process to the step S22 to S24 in FIG. 4 in the step S31 to S33 (reference characteristic value extracting means). Thus the reference hash value H1 will be extracted from the copied data on the manufacturer side B2 (T) and restored.

[0066] Then, in step S34 (the comparison object original value calculating means), the determination unit 26 calculates the hash value on the manufacturer side H3 as the comparison object original value from the copied data on the manufacturer side B2 (T). In this case, the determination unit 26 removes the tag T attached by the drawing output processor 22 from the copied data on the manufacturer side B2 (T), and calculates the hash value on the manufacturer side H3.

[0067] In step S35 (the determination means), the determination unit 26 compares the reference hash value H1 calculated in the step S33 with the hash value on the manufacturer side H3 calculated in step S34 (H1=H3?).

[0068] When the reference hash value H1 and the hash value on the manufacturer side H3 are confirmed to coincide in step S35 (YES), the value of the flag Fc

in the following step S36 describing the authenticity of the copied data on the manufacturer side B2 is set as Fc=1 to show that no changes have been made to the copied data on the manufacturer side B2.

[0069] When it is confirmed that the reference hash value H1 and the hash value on the manufacturer side H3 do not coincide in step S35 (NO), the value of the flag Fc in the following step 37 describing the authenticity of the copied data on the manufacturer side B2 is set as Fc=2 to show that changes are made to the copied data on the manufacturer side B2.

[0070] Moreover, by executing the process of steps S25 to S28 in FIG. 4 after steps S36 or S37, whether or not the copied data has been changed on the customer side A2 can also be determined. Therefore whether or not both of the copied data on the customer side A2 and/or the copied data on the manufacturer side B2 has/have been changed can be determined.

[0071] The electronic data management system 10 in the embodiment of the present invention is therefore capable of determining the authenticity of copied data on the customer side A2 and the copied data B2 on the manufacturer side B2 by comparing the reference hash value H1 based on the original data A1 attached to the copied data on the manufacturer side B2 (T) with the hash value on the customer side H2 calculated from the copied data on the customer side A2 and the hash value on the manufacturer side H3 calculated from the copied data on the manufacturer side B2. Therefore the authenticity of the copied data on the customer side A2 and the copied data on the manufacturer side B2 can be managed securely.

[0072] Further, as the sources of the copied data on the customer side A2 and the copied data on the manufacturer side B2 are managed in the computer system on the customer side 12, the computer system on the customer side 12 is capable of specifying in which of the computer system on the customer side 12 or the computer system on the manufacturer side 14 a change to the copied data on the customer side A2 and the copied data on the manufacturer side B2 has been made.

[0073] The reference hash value H1 is encrypted and embodied in the original data A1 as the tag T by use of the electronic water-mark technology, so that no system other than the computer system on the customer side 12 and especially the drawing output processor 22 and the determination unit 26, can confirm the existence of the tag T, or determine or change the contents of the tag T. Therefore the authenticity of the copied data on the customer side A2 and the copied data on the manufacturer side B2 can be managed securely.

[0074] The electronic data management system 10 in the embodiment of the present invention can also be ap-

Claims

1. An electronic data management system for using electronic data (A₁, A₂, B₂) mutually among a plurality of computer systems (12, 14) classified into at least two groups of computer system (12, 14), comprising:

reference characteristic value extraction means (26) for extracting a reference characteristic value (H1) from a copy of electronic data (B2(T)) attached with a reference characteristic value (H1) obtained from original electronic data (A1),

comparison subject characteristic value calculating means (26) for calculating a comparison subject characteristic value (H2, H3) from the copied electronic data (B2) and/or electronic data (A2) recopied from the original electronic data (A1); and

determining means (26) for determining authenticity of the copied electronic data (B2) and/or the recopied electronic data (A2) by comparing the reference characteristic value (H1) and the comparison subject characteristic value (H2, H3).

2. The electronic data management system of claim 1, the computer systems being classified into a management computer system (12) provided with the reference characteristic value extraction means (26), the comparison subject characteristic value calculating means (26), and the determining means (26), and a managed computer system (14) not belonging to the managing computer system (12), wherein the source of the copied electronic data (B2) and/or the recopied electronic data (A2) is managed by the management computer system (12).

3. The electronic data management system of claim 2, the computer management system (12) being provided with reference characteristic value attaching means (22) for attaching the reference characteristic value (H1) calculated based on the original electronic data (A1) to the original electronic data (A1).

4. The electronic data management system of any one of claims 1 to 3 wherein each item of electronic data (A1, A2, B2) is electronic drawing data, and each characteristic value (H1, H2, H3) is a hash value calculated based on graphic information included in each item of electronic drawing data (A1, A2, B2).

5. The electronic data management system of claim 2 or 3, the computer system (12) on customer side being provided with determination means (26) for

42 - Hash value encryption means

44 - Tag attachment means

Guide to the FIGS

[0079]

FIG. 1

10 - Computer system on manufacturer side

12 - Computer system on customer side

14 - Computer system at manufacturer side

16 - Drawing production unit

20 - Order placing unit

22 - Drawing output processor

24 - Inspection unit

26 - Determination unit

30 - Order receiving unit

32 - Manufacturing unit

FIG. 2

(Left) From order placing unit 20

(Right) To order receiving unit 30

20 - Order receiving unit

22 - Drawing output processor

30 - Order receiving unit

40 - Hash value calculation means

42 - Hash value encryption means

44 - Tag attachment means

FIG. 4

S22: Extract Tag T from the copied data on the manufacturer side B2 (T)

S23: Extract an encrypted reference hash value H1' from Tag T

S24: Decrypt a reference hash value H1 from the encrypted reference hash value H1'

S25: Calculate hash value H2 on the customer side according to the copied data A2 on the customer side.

S26: Output the information collected from Flags Fa and Fb to an output device.

FIG. 5

S31: Extract Tag T from the copied data on manufacturer side B2 (T).

S23: Extract an encrypted reference hash value H1' from Tag T

S33: Restore a reference hash value H1 from the encrypted reference hash value H1'.

S34: Calculate hash value H3 on the manufacturer side according to the copied data B2 on the manufacturer

plied to electronic data management systems for managing various sorts of electronic data other than the electronic drawing data.

[0075] The present invention enables the accurate determination of the authenticity of electronic data, and enables the computer system used in changing electronic data to be specified in cases where electronic data is found to be not authenticated, while retaining a simple configuration.

[0076] In summary it is an object to provide an electronic data management system with a simplified configuration, wherein the authenticity of the electronic data and the specification of the source of unauthenticated electronic data can be determined accurately.

[0077] To achieve this, a drawing output processor 22 transmits original data A1 which is original electric drawing data to an order receiving unit 30 with a tag T attached. The order receiving unit 30 and a manufacturing unit 32 transmit a manufacturer's copied data B2(T) copied from the original data A1 (T) to an inspection unit 24.

The inspection unit 24 transmits the inspection result Fa for the product M, the client's copied data A2 re-copied from the original data A1, and the manufacturer's copied data B2 (T) to a determination unit 26. The determination unit 26 compares the tag T extracted from the manufacturer's copied data B2 with the original value of the client's copied data A2 and the original value of the manufacturer's copied data B2 and determines the authenticity of the client's copied data A2 and the manufacturer's copied data B3.

Description of the Numerals

[0078]

10 - Electronic data management system

12 - Customer computer system

14 - Manufacturer computer system

16 - Drawing production unit

18 - Storage device

20 - Order placing unit

22 - Drawing output processor

24 - Inspection unit

26 - Determination unit

30 - Order receiving unit

32 - Manufacturing unit

40 - Hash value calculation means

determining whether or not the product (M) and the electronic drawing data (A2, B2) coincide by comparing the electronic drawing data taken as the copied electronic data (A2) sourced from the computer system (12) on customer side, and/or the electronic drawing data taken as the copied electronic data (B2) sourced from the computer system (14) on manufacturer side with the product (M) delivered by the computer system (14) on manufacturer side, wherein the management computer system (12) is the computer system on the customer side for placing orders for manufacture of the product (M) based on the electronic drawing data as the original electronic data (A1) and the managed computer system (14) is the computer system on manufacturer side for manufacturing the product (M) ordered by the computer system (12) on the customer side and for delivering the product (M).

6. The electronic data management system of any one of claims 1 to 5, wherein the reference characteristic value (H1) is encrypted and embedded in the electronic data (A1(T1), B2(T2)) utilizing electronic watermark technology.

7. The electronic data management system of any one of claims 1 to 6, wherein the reference characteristic value (H1) is embedded in the electronic data (A1(T1), B2(T2)) utilizing electronic watermark technology.

8. An electronic data management method for storing original electronic drawing data (A1) and outputting the original electronic drawing data (A1) as the drawing data of a product (M) to be ordered from a manufacturer, comprising the steps of: calculating a reference characteristic value (H1) from graphic information of the original electronic drawing data (A1) in advance and outputting the original electronic drawing data (A1(T1)) affixed with the reference characteristic value (H1) to the manufacturer, and determining whether or not either of the copied electronic drawing data (B2) and/or the recopied electronic drawing data (A2) have/has been altered by comparing the reference characteristic value (H1) with the comparison object original value (H2).

FIG. 4

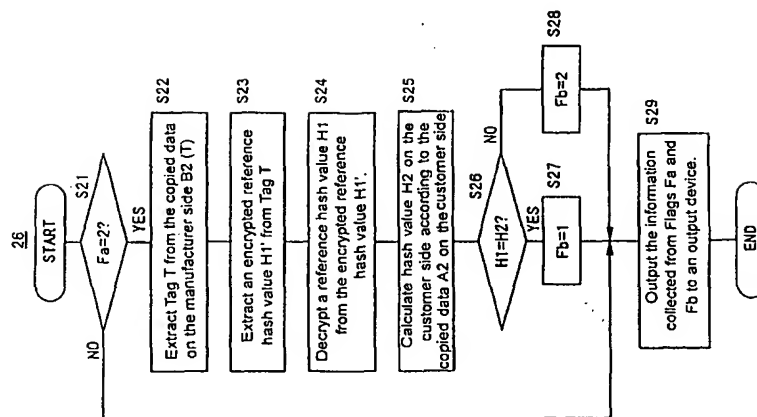


FIG. 5

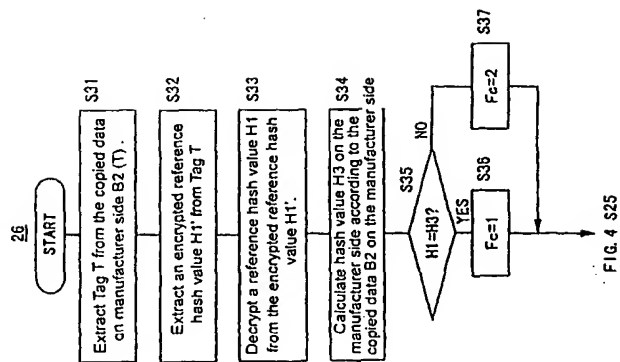


FIG. 4 S25